

ONELINK

Cost Effective Retrofit & Remodel Solutions

- Wireless interconnect technology eliminates the need to pull wires through existing walls
- Save an average of between \$150 - \$200** per alarm when compared to retrofitting hardwired alarms in existing walls or ceilings
- Faster job turnaround - 4X more jobs completed increases your profits
- Photoelectric sensing technology saves maintenance calls with fewer nuisance alarms.



RF Interconnect: Reliable and secure radio frequency communication between alarms. 915 MHz frequency with 65,000 security codes and 3 channel frequency hopping.



Photoelectric Technology: Helps reduce nuisance alarms, especially around kitchens and baths.



Spread Spectrum Horn Tone: Lower and varying horn frequency makes it easier for elderly with normal age related hearing loss to hear horn.



Test/Silence Button: Alarm Silence and low battery silence



Optipath 360 Technology: Patented technology provides 360 degrees of direct access to smoke sensor.



Latching Features: Alarm latch and low battery latch.

Warranties:

5 year Warranty: SC0500B, CO511B

10 year Warranty: SA511B, SA520B



SC0500B

Battery Combination
Smoke & CO Alarm

Exclusive!
Voice Warning!
WITH THE LOCATION!

- **Exclusive!** Voice alarm with programmable location. Programmable with up to 11 locations (ex. "basement"). When alarm sounds (if programmed for basement), it will say, "**Warning, Evacuate, Smoke in Basement**". If other First Alert OneLink Voice Warning alarms are located throughout the house they will also signal, "**Warning, Evacuate, Smoke in Basement**".



CO511B
Battery Carbon
Monoxide Alarm



SA511B
Battery Smoke Alarm



SA520B
Bridge Unit-Wireless
Hardwired Smoke Alarm

**Note: Based on average retrofitting costs of time, material and labor to connect to existing alarm circuit, drywall repairs, painting, etc. Special cases that require conduit, wire mold, concrete drilling, etc. would add additional costs and increase savings.

Hardwired

Smoke Alarms

BRK
THE PROFESSIONAL STANDARD



9120 SERIES

120V AC & AC/DC SMOKE ALARMS

- Single button test/silence
- Alarm latch
- Smart Technology
- 10 year warranty

Listed to
UL 217
Standard

Available versions:

- 9120: AC only
- 9120B: AC with 9V battery backup
- 9120AB: AC with 9V Alkaline battery backup
- 9120LB: AC with 9V Lithium battery backup

9120 Series - "The smoke alarm standard of excellence."

7010 SERIES

AC & AC/DC PHOTOELECTRIC SMOKE ALARMS

7010/7010B



7020B

- Photoelectric smoke sensing technology
- Single button test/silence
- Optipath 360 Technology
- 10 year warranty
- Escape light illuminates path to safety (model 7020B)

Listed to
UL 217
Standard

Available versions:

- 7010: AC only
- 7010B: AC with 9V battery backup
- 7020B: AC with 9V battery backup & escape light

Recommended for installation outside areas that are prone to nuisance alarms such as kitchens, bathrooms and utility rooms. Escape light recommended for hallway applications.

Miscellaneous

SL177

120V AC SMART STROBE



Listed to
UL 1971
Standard

- Separate flash patterns to distinguish between a smoke/heat or CO danger
- Bright 177 candela strobe light
- 1Hz flash rate meets ADA, ANSI 117.1, NFPA 72 and UL 1971 requirements for visual signaling devices
- Can be interconnected with BRK/First Alert alarms
- 10 year warranty

What's a "Smart Strobe"? Separate flash patterns help a hearing impaired person better distinguish the danger present. The flash patterns approximate the audible alarm sound emitted by either a smoke/heat alarm or a carbon monoxide alarm.

FOR MORE INFO, CALL YOUR CES SPECIALIST

BRK
THE PROFESSIONAL STANDARD

Hardwired

Carbon Monoxide Alarms

SC7010 SERIES

120V AC/DC PHOTOELECTRIC SMOKE & CO COMBO ALARM W/VOICE

- Voice Warning with Location - (SC7010BV)
- Alarm latch and low battery latch
- Alarm silence and low battery silence
- 5 year warranty
- End of Life Signal

Available versions:

- SC7010B: AC with 2AA alkaline battery backup
 SC7010BV: AC with 2AA alkaline battery backup and voice

FYI: "Voice with Location" provides necessary hazard location information for blind or visually impaired residents.

Listed to
**UL 217,
 UL 2034**
 Standard



120V AC/DC SMOKE & CO COMBO ALARM

SC9120B

- Single button test/silence
- Alarm latch
- Alarm silence and low battery silence
- Intelligent Sensing Technology
- End of Life Signal
- 5 year warranty

Listed to
**UL 217,
 UL 2034**
 Standard



Combination alarms save time and money on installation.

120V AC/DC CARBON MONOXIDE ALARMS

CO5120 SERIES

- Single button test/silence
- Alarm latch
- Alarm silence and low battery silence
- Intelligent Sensing Technology
- 5 year warranty
- End of Life Signal
- LCD digital display with memory (CO5120PDBN)

Listed to
UL 2034
 Standard



CO5120PDBN

MANY OTHER ITEMS AVAILABLE AT CES

Hardwired

Miscellaneous

BRK
THE PROFESSIONAL STANDARD

HD6135FB

120V AC/DC HEAT ALARM W/RATE-OF-RISE


 Listed to
UL 539
 Standard

- 135°F Fixed temperature and Rate-of-Rise
- Remote Control Silence/Test
- Alarm latch
- Alarm silence and low battery silence
- 9V battery backup
- For applications not suitable for smoke alarms
- 10 year warranty

Understanding Rate of Rise

This allows the unit to sense a heat rise and alarm prior to reaching the fixed temperature. The alarm will sound when the microprocessor senses a temperature rise of a set number of degrees per minute. This enables a more rapid response to a potential fire.



RM4

RELAY



- Works with "Smart interconnect" BRK CO alarms
- 120-volt AC-powered.
- Form-C contacts that switch between normally open and closed contacts
- Maximum contact rating: 120-volt AC and 30-volt DC; Resistive-15 amps; Motor-1/3 horsepower
- 10 year warranty

Battery

Smoke Alarms

FG250 SERIES



- Hinged cover for easy battery replacement
- Lighted Power and Alarm indicator
- Silence feature
- Tamper resistant locking pin
- RV approved
- 9V battery operated
- 10 year warranty

 Listed to
UL 217
 Standard

 Available versions:
 FG250B: Silence with carbon zinc battery
 FG250AB: Silence with alkaline battery
 FG250LB: Silence with lithium battery

The most feature rich alarm in its class.
CALL CES FOR A FULL LINE CATALOG



Smoke Alarms

Battery/Plug-in

SA340B

10 YEAR SEALED SMOKE ALARM

- 10 Year sealed lithium powercell prevents battery theft
- Tamper proof design
- Single button test/silence
- 10 year warranty
- Meets Oregon assembly bill #874 requirements

Listed to
UL 217
Standard



Never change a battery again!

Saves battery replacement and maintenance costs.
Recommended for multi-family and dormitory applications.

Carbon Monoxide Alarms

9V BATTERY CO ALARMS

CO250B

- Hinged cover for easy battery replacement
- Lighted Power and Alarm indicator
- Silence feature
- Tamper resistant locking pin
- 9V battery operated
- 5 year warranty
- End of Life Signal

Listed to
UL 2034
Standard



Multi-family Manager Tip: 9V batteries are less prone to tenant theft for use in other electronic devices.

PLUG-IN CO ALARMS W/BATTERY BACKUP

CO600 SERIES

- Electrochemical CO sensor
- Single button test/silence
- Alarm silence and low battery silence
- 9V Alkaline battery backup
- End of life signal
- Digital display (CO614B only)
- 5 year warranty

Listed to
UL 2034
Standard




CO614B

CO604B

The FUTURE Of Fire Safety

- **4X more effective than a traditional Fire Extinguisher*** (See chart)
- **Easy Clean up – Won't damage appliance or counter surfaces like a traditional ABC fire extinguisher. Reduces maintenance and clean-up costs.**
- **Intuitive to use – Familiar spray can form. No pins to pull or bulky cans to lift.**
- **Perfect for Apartments, Home, Auto and Marine**
- **No Hazmat Fees**

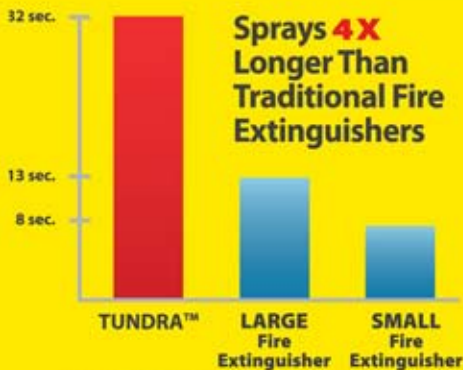

*4x greater than 2-B-C or 5-B-C kitchen fire extinguisher; Minimum of approximately 32 seconds vs. approximately 8 seconds



AF400 Tray
Qty: 4



AF400-12SD Shelf Display
Qty: 12



AF400-18WP Gravity Display
Qty: 18

FOR MORE INFO, CALL YOUR CES SPECIALIST



ECO-EXHAUST SERIES



The ENERGY STAR® ECO-Exhaust Fan Series provides solutions for areas needing higher volume ventilation that operates at barely audible sound levels, is cost effective, and energy efficient.

- Perfect ASHRAE 62.2 solution
- Motors suitable for continuous operation and the extremely low sound levels make them perfect for continual usage.
- 6" round duct connector with spring loaded metal damper protects against back drafts
- Listed for installation over a tub or shower on a GFCI circuit
- Side access panel allows you to wire the fan from inside or outside the housing

LOWEST
HVI/SOUND
RATING POSSIBLE

MODEL	DESCRIPTION	HVI CFM	HVI SONES	DUCT SIZE
ES80S	Single Speed Whole House ENERGY STAR® Exhaust Fan	80	<0.3	6"
ES80D	Dual Speed Whole House ENERGY STAR® Exhaust Fan	30/80	<0.3	6"
ES130S	Single Speed Whole House ENERGY STAR® Exhaust Fan	80	<0.3	6"
ES130D	Dual Speed Whole House ENERGY STAR® Exhaust Fan	50/130	<0.3	6"

ENERGY STAR® DELUXE QUIET SERIES with LIGHT



The ENERGY STAR® Deluxe Quiet Series with Light provides cost effective, energy efficient ventilation at low sound levels. The series features an energy efficient fluorescent light with a contoured low profile grill, a moonstone glass lens and a 4 watt night light.

- Included 26 watt, 4 pin, high efficacy lamp complies with the California Title 24 Residential Lighting Standard and provides the equivalent of 100 watts of incandescent lighting
- Motors suitable for continuous operation.
- Spring loaded metal damper protects against back drafts
- Listed for installation over a tub or shower on a GFCI circuit
- Side access panel allows you to wire the fan from inside or outside the housing

MODEL	DESCRIPTION	HVI CFM	HVI SONES	DUCT SIZE
AKF80LS	ENERGY STAR® Exhaust Fan with Fluorescent Lighting	80	0.8	4"
AKF100LS	ENERGY STAR® Exhaust Fan with Fluorescent Lighting	100	1.5	4"

specifications subject to change

www.airkinglimited.com

MANY OTHER ITEMS AVAILABLE AT CES



ENERGY STAR® QUIET SERIES

The ENERGY STAR® Quiet Series provides cost effective, energy efficient ventilation at low sound levels and features a contoured grill that almost disappears into the ceiling.

- Motors suitable for continuous operation.
- Spring loaded metal damper protects against back drafts
- Listed for installation over a tub or shower on a GFCI circuit
- Side access panel allows you to wire the fan from inside or outside the housing



MODEL	DESCRIPTION	HVI CFM	HVI SONES	DUCT SIZE
AK50LS	Deluxe ENERGY STAR® Exhaust Fan	50	0.5	4"
AK80LS	Deluxe ENERGY STAR® Exhaust Fan	80	0.6	4"
AK110LS	Deluxe ENERGY STAR® Exhaust Fan	110	1.5	4"
AK150LS	Deluxe ENERGY STAR® Exhaust Fan	150	1.5	6"
AK200LS	Deluxe ENERGY STAR® Exhaust Fan	210	2.0	6"
AK80LS-1	ENERGY STAR® Exhaust Fan	80	1.0	4"
AK80	ENERGY STAR® Exhaust Fan	80	1.5	4"
AK90	ENERGY STAR® Exhaust Fan	90	1.5	4"
AK110PN	ENERGY STAR® Exhaust Fan	100	1.5	4"
AK110	ENERGY STAR® Exhaust Fan	110	2.0	4"

ENERGY STAR® HIGH PERFORMANCE SERIES

The ENERGY STAR® High Performance Exhaust Fan Series features an unique Snap-In Installation System. The included bracket nails or screws to the ceiling joist allowing the fan housing to "Snap-In". Connect the wiring and the ducting, install the easy fitting grill and you are done.

- Motors suitable for continuous operation.
- Easily installs using the included Snap-In Mounting System
- Listed for installation over a tub or shower on a GFCI circuit
- Wire nuts and romex connector are included

SNAP-IN
INSTALLATION



MODEL	DESCRIPTION	HVI CFM	HVI SONES	DUCT SIZE
BFQ50	Deluxe ENERGY STAR® Exhaust Fan	50	0.5	4"
BFQ75	Deluxe ENERGY STAR® Exhaust Fan	70	1.5	4"